

# MIPOLAM ELEGANCE


FLOORING AND SHOWER SYSTEM

[gerflor.com](http://gerflor.com)






**Gerflor**<sup>®</sup>  
theflooringgroup

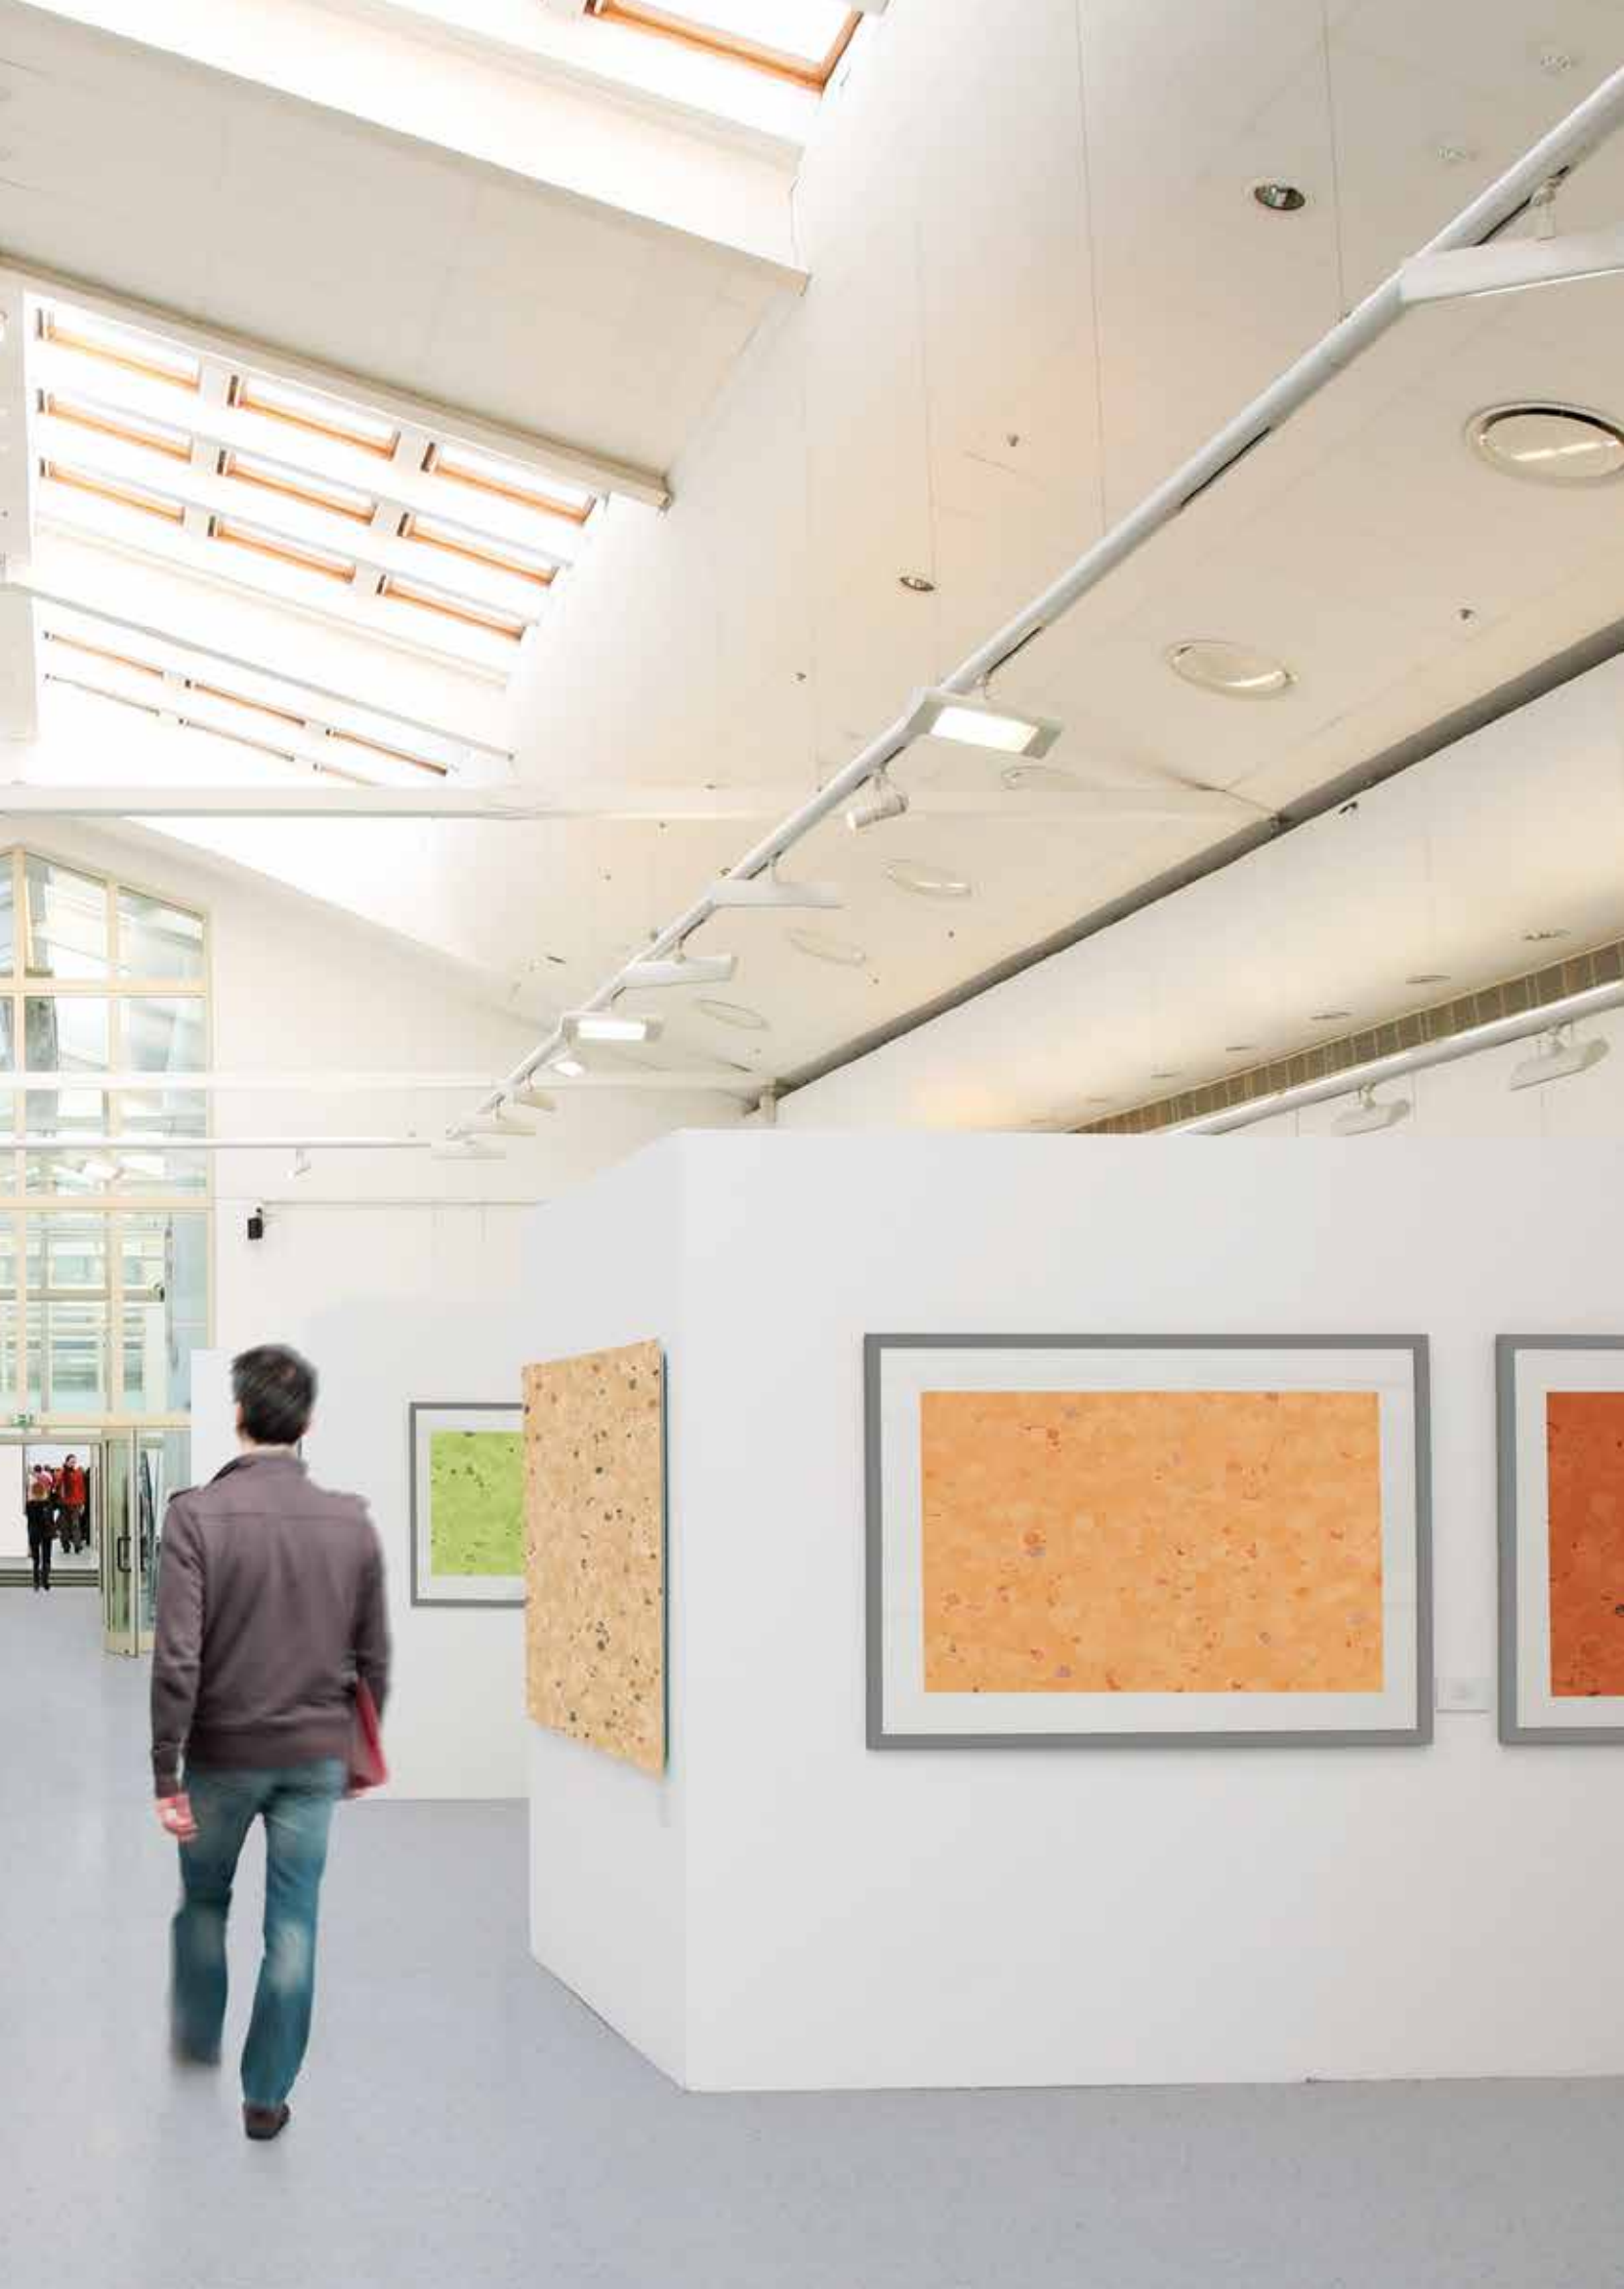







# MIPOLAM ELEGANCE


 2 m		34-43	Evercare™	 100% recyclable
--	---	-------	-----------	---

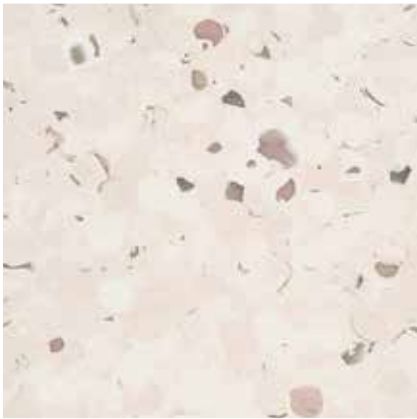


**0347 Mangoustan**  
NCS: 1005-Y60R / LRV: 67,9

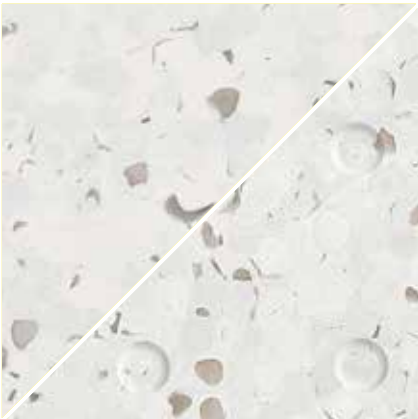

**0705 Patisson**  
NCS: 1502-Y / LRV: 64,4

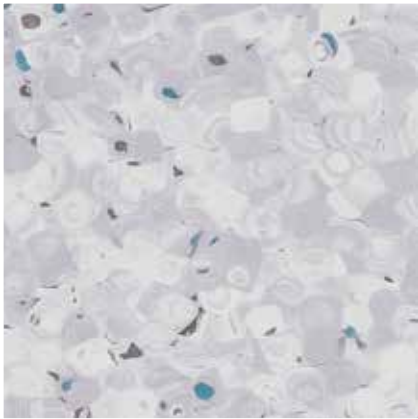

**0318 Grape**  
NCS: 2005-R80B / LRV: 51,4

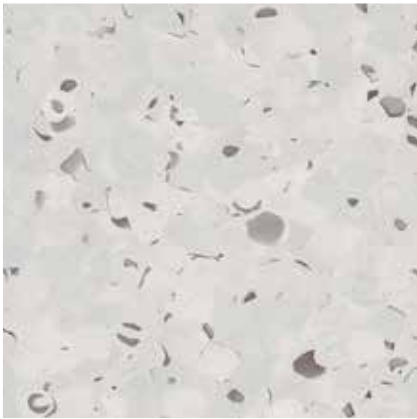


**0696 Ginger**  
NCS: 1502-B / LRV: 59,7




**0343 Pecan**  
NCS: 2500-N / LRV: 46,9




**0697 Greenstone**  
NCS: 3005-R80B / LRV: 37,1

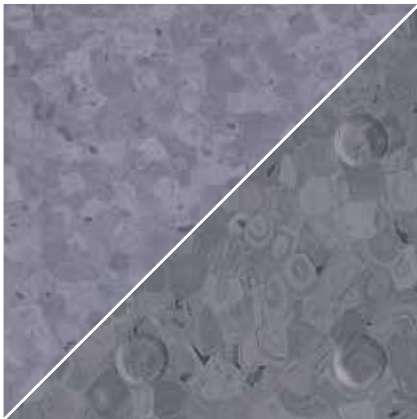

**0704 Raspberry Grey**  
NCS: 5005-R80B / LRV: 20,3

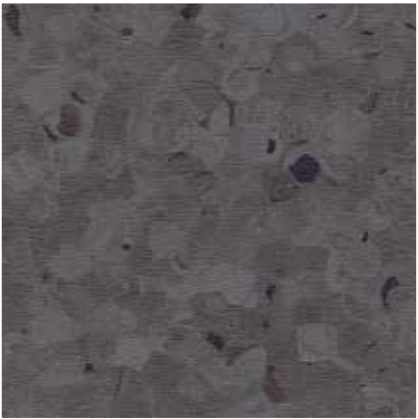

**0344 Nutmeg**  
NCS: 7000-N / LRV: 11,8

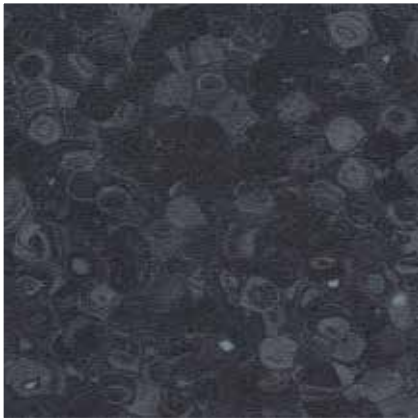

**0321 Olive**  
NCS: 8502-B / LRV: 6,9




Homogeneous sheet without foam backing (Compact) -  Tiles (608 x 608 mm) available for a minimum order quantity of 500 sqm




**0323 Nut**  
NCS: 2005-Y20R / LRV: 50,6




**0328 Almond**  
NCS: 1505-Y30R / LRV: 61,0

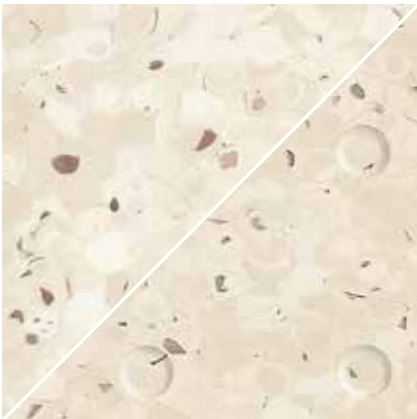


**0322 Jicama**  
NCS: 1505-Y20R / LRV: 67,8

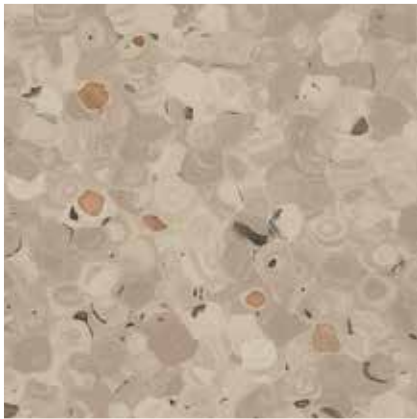


**0324 Chestnut**  
NCS: 3005-Y20R / LRV: 37,2

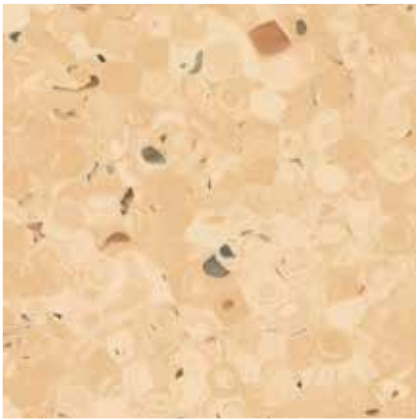


**0327 Pear**  
NCS: 1015-Y30R / LRV: 55,0

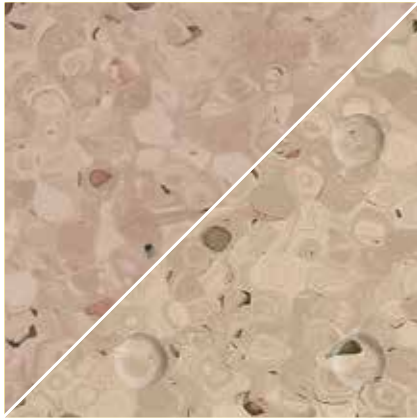

**0329 Hazelnut**  
NCS: 3010-Y40R / LRV: 36,4

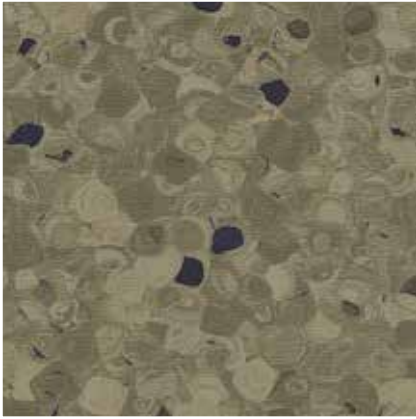

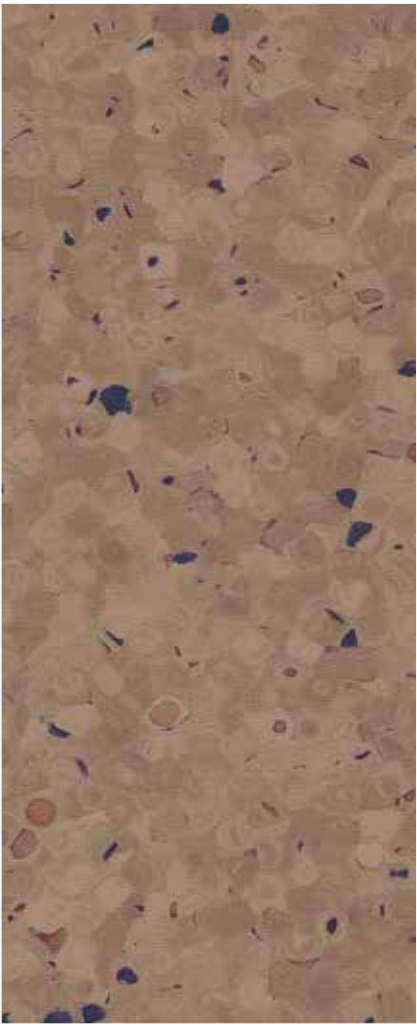


**0326 Jojoba**  
NCS: 5020-G70Y / LRV: 18,9




**0698 Cacao**  
NCS: 6010-Y30R / LRV: 17,7




# MIPOLAM ELEGANCE


 2 m		34-43	Evercare™	 100% recyclable
--	---	-------	-----------	---

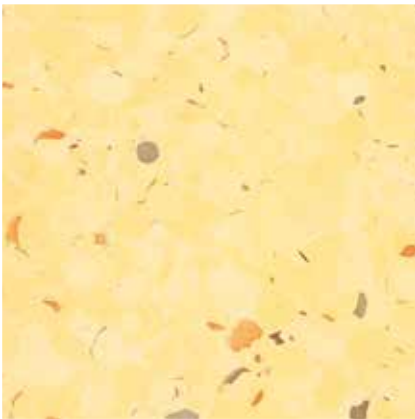


**0699 Banana**  
NCS: 0520-Y20R / LRV: 64,3

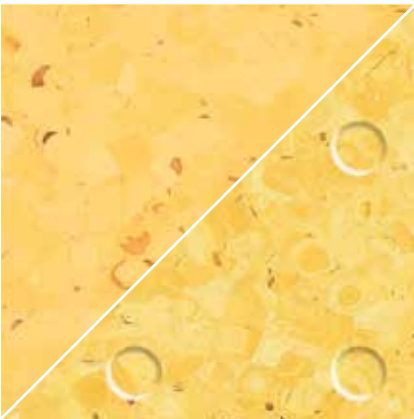


**0333 Ananas**  
NCS: 0550-Y10R / LRV: 57,9

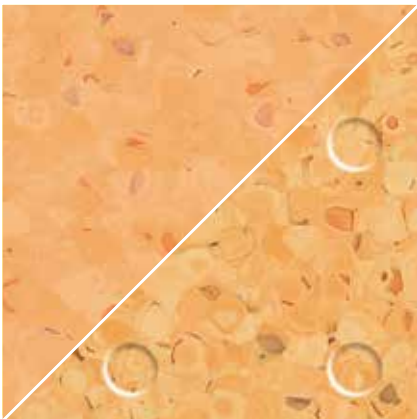

**0700 Melon**  
NCS: 1040-Y30R / LRV: 48,2

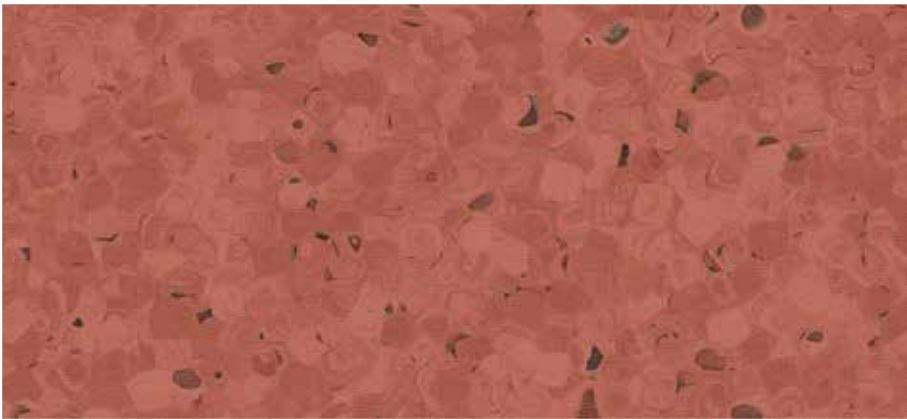

**0330 Litchi**  
NCS: 4030-Y80R / LRV: 17,5

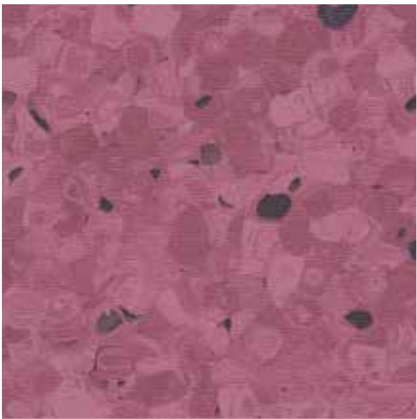

**0331 Plum**  
NCS: 4040-R10B / LRV: 15,0



**0702 Kumquat**  
NCS: 3060-Y60R / LRV: 19,8




**0336 Acerola**  
NCS: 2570-Y80R / LRV: 12,6




Homogeneous sheet without foam backing (Compact) -  Tiles (608 x 608 mm) available for a minimum order quantity of 500 sqm



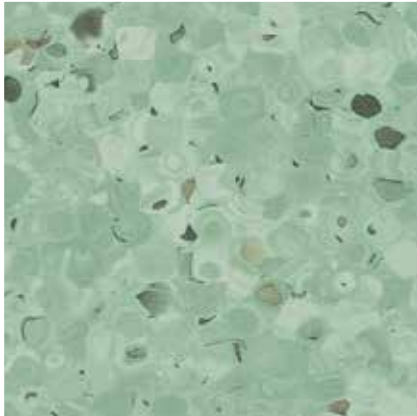


**0339 Apple**  
NCS: 2020-G10Y / LRV: 40,6

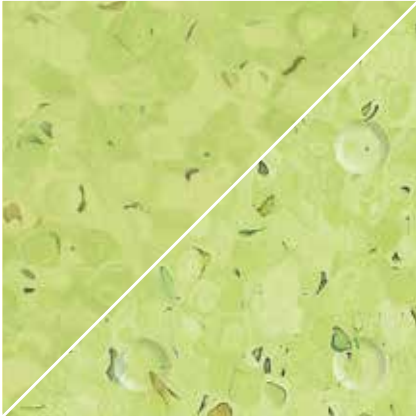


**0338 Kiwi**  
NCS: 1040-G50Y / LRV: 47,9




**0703 Lime**  
NCS: 1030-G90Y / LRV: 58,5

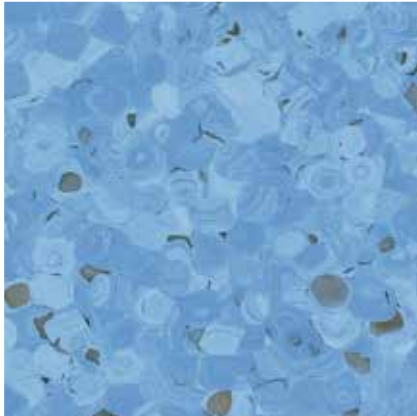

**0348 Bluetta**  
NCS: 2040-R90B / LRV: 34

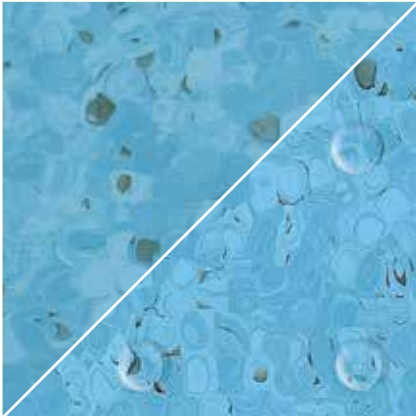


**0341 Bilberry**  
NCS: 2040-B10G / LRV: 34,8

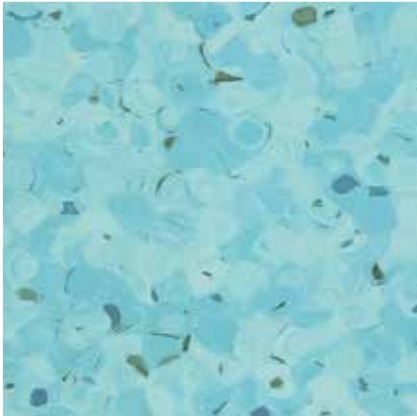


**0340 Jambolan**  
NCS: 1030-B30G / LRV: 45,6



**0349 Bluecrop**  
NCS: 4030-R80B / LRV: 17,8

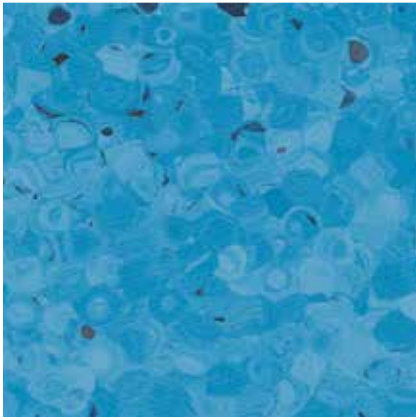

**0342 Blueberry**  
NCS: 2050-B / LRV: 25,8

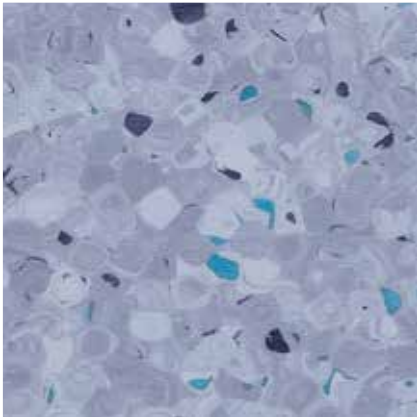


**0319 Quetsche**  
NCS: 3020-R80B / LRV: 31,0



# MIPOLAM ELEGANCE

A large choice of 33 colours equipped with a revolutionnary surface treatment

- High performance homogeneous flooring suitable for heavy duty traffic, available in sheet format.
- **Group T** wear rating compliant (very high resistance to traffic).
- Innovative true non-directionnal design, available in 33 contemporary colours.
- Elegant design with transparent particles (100 % PVC) for 3D effect and modern matt finish.
- Evercare™ surface treatment: no wax for life.
- 100% recyclable.

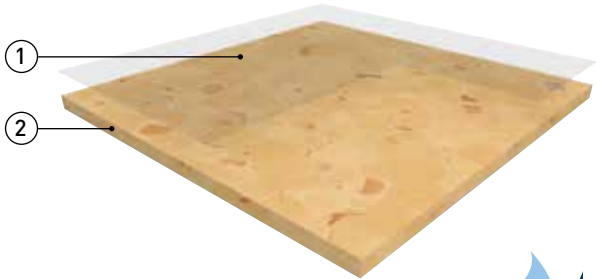

- ① evercare™ surface treatment
- ② 2 mm pressed monolayer



**MIPOLAM ELEGANCE** is a monolayer homogeneous flooring with a high PVC content pressed in 2m sheets, with a thickness of 2mm and a weight of  $\leq 2850\text{g}$ . The non directional design with colour throughout the thickness integrates a 3D effect (transparent particles in pure PVC on all 33 references) and a matt finish. This flooring is recommended for administrative buildings making skirtings easier, as well as angles and welding. The flooring is equipped with Evercare™ the latest improvements in polyurethane surface treatment obtained by UV laser cross-linking. This Evercare™ treatment avoids staining of chemical products used in Healthcare like betadine, eosin or anti-bacterial hand gel and increases the durability of the flooring.

This treatment has excellent maintenance characteristics and does not require the application of acrylic polishes. The flooring is composed of minimum 25% recycled content 100% controlled and is REACH compliant. This flooring is anti-static ( $<2\text{kV}$ ) and resistant to the main chemical products used in healthcare (no impact of betadine after 24 hours). The product is non reactive to residual indentation with a value  $\leq 0,02\text{ mm}$  (EN 433). The flooring complies with EN 649 (34-43) offering a group T wear rating suitable for heavy duty traffic areas and Bfl-s1 fire resistance. The product emission rate of volatile organic compounds is  $<10\text{ }\mu\text{g/m}^3$  (TVOC after 28 days ISO 16000-6).

## EVERCARE™ TECHNOLOGY

AN EXCLUSIVE PATENTED TECHNOLOGY BY GERFLOR

### THE BEST CHEMICAL STAIN RESISTANCE SURFACE TREATMENT

<p><b>Highly Durable:</b> Exclusive surface treatment applied by UV laser cross-linking provides superior durability and an even surface thickness, creating an impenetrable barrier against stains and chemicals found in healthcare.</p> <p><b>Longer life expectancy.</b></p>	<p>evercare™ BY GERFLOR</p> <p>GERFLOR: EVEN THICKNESS</p>	<p>OTHER TREATED FLOOR COVERING</p> <p>COMPETITOR: MISSING TREATMENT AND UNEVEN THICKNESS</p>
<p><b>100% non-porous surface:</b> The surface treatment creates a 100% non-porous barrier to all liquids and chemicals, keeping all stains floating on the surface.</p> <p><b>Simple and easy stain removal.</b></p>		



# SPECIAL SHOWER ELEGANCE SD

The bathroom is coordinated to the room with 8 anti-slip references complying with bare foot standard




0705 Patisson



0322 Jicama



0329 Hazelnut




0704 Raspberry Grey




0700 Melon



0333 Ananas



0338 Kiwi




0341 Bilberry



Special shower Elegance SD consists of a 2.4 mm (on grain side) monolayer sheet with the design through the whole thickness and a specific embossing for use with bare foot (DIN 51 097 - Class B).



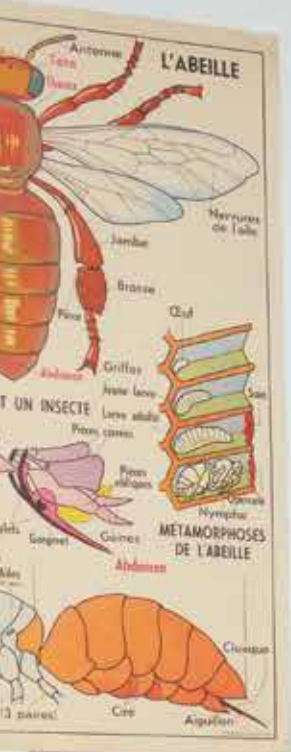


Shower threshold: Connection SD floor with a 2 mm floor.









		MIPOLAM ELEGANCE		ELEGANCE SD	
DESCRIPTION / <i>BESCHREIBUNG</i> / DESCRIPTION / <i>BESCHRIJVING</i> / DESCRIPCIÓN / <i>DESCRIÇÃO</i> / DESCRIZIONE					
Total thickness / <i>Gesamtdicke</i> / Epaisseur totale / <i>Totale dikte</i> / Espesor total / <i>Espessura total</i> / Spessore totale	EN 428	mm	2.00	2.4 (on grainside)	
	ASTM F386-02	inch	0.08	-	
Weight / <i>Flächengewicht</i> / Poids / <i>Gewicht</i> / Peso / <i>Peso</i> / Peso	EN 430	g/m²	2850	3015	
Width/length of sheet / <i>Bahnenbreite/-länge</i> / Largeur/longueur des lés / <i>Rolbreedte/Rollengte</i> / Ancho/largo de rollos / <i>Largura/comprimento dos rolos</i> / Larghezza/lunghezza dei teli	EN 426	cm/lm	200/20	200/20	
	-	feet - inch	6'6" / 66"	6'6" / 66"	
Coverage / roll	-	m²	40	40	
	-	sq.ft	430.56	430.56	
Tile size / <i>Format Fliesen</i> / Format dalles / <i>Formaat der tegels</i> / Dimensiones de las losetas / <i>Dimensões dos mosaicos</i> / Dimensione delle piastre	EN 427	mm	608 x 608 *	-	
Number of tiles per package / <i>Fliesen-Anzahl</i> / Nombre de dalles par boîte / <i>Aantal tegels per doos</i> / Cantidad de losetas/caja / <i>Quantidade dos mosaicos/caixa</i> / N° piastre per confezione	-	-	20	-	
CLASSIFICATION / <i>KLASSIFIZIERUNG</i> / CLASSIFICATION / <i>CLASSIFICATIE</i> / CLASIFICACIONES / <i>CLASSIFICAÇÕES</i> / CLASSIFICAZIONI					
Norm/product specification / <i>Produkt Norm</i> / Norme produit / <i>Technische eigenschappen</i> / Normas / <i>Normas</i> / Norma prodotto	-	-	EN 649	EN 649	
	ASTM F 1913-04	-	compliant	-	
European classification / <i>Europäische Klassifizierung</i> / Classement européen / <i>Europese classificatie</i> / Europea / <i>Europeia</i> / Europea	EN 685	class	34-43	34-43	
Fire rating / <i>Brandverhalten</i> / Classement feu / <i>Brand classificatie</i> / Fuego / <i>Fogo</i> / Reazione al fuoco	EN 13501-1	class	B <sub>fl</sub> - s1	B <sub>fl</sub> - s1	
	ASTM E648-08	class	Class 1	-	
	CAN/ULC 102.2	-	-	-	
Static electrical propensity / <i>Begehaufladung</i> / Potentiel de charge / <i>Elektrische eigenschappen</i> / Comportamiento electrostático / <i>Comportamento electrostático</i> / Resistenza elettrica	EN 1815	kV	< 2	< 2	
Slip resistance wet : bare foot / <i>Rutschhemmung - nassbelastete Barfussbereiche</i> / Glissance humide / <i>Anti-slip</i> / Deslizamiento húmedo/ <i>Escorregamento húmido</i> / Scivolosità umida	DIN 5197	class	-	B	
PERFORMANCE / <i>TECHNISCHE EIGENSCHAFTEN</i> / PERFORMANCES / <i>TESTRESULTAAT</i> / CUALIDADES TÉCNICAS / <i>PERFORMANCES</i> / CARATTERISTICHE TECNICHE					
Wear resistance / <i>Verschleißverhalten</i> / Résistance à l'usure / <i>Slijtvastheid</i> / Abrasión / <i>Abrasão</i> / Resistenza all'abrasione	EN 660.2	mm³	≤ 2.0	≤ 4.0	
Wear group / <i>Verschleißgruppe</i> / Groupe d'abrasion / <i>Groep slijtvasheid</i> / Grupo de abrasión / <i>Grupo de abrasão</i> / Gruppo di abrasione	EN 649	group	T	P	
Type binder content / <i>Bindenmittelgehalt</i> / Teneur en agent liant	ISO 10581	Type	I	I	
Dimensional stability / <i>Maßstabilität</i> / Stabilité dimensionnelle / <i>Maatvastheid</i> / Estabilidad dimensional / <i>Estabilidade dimensional</i> / Stabilità dimensionale	EN 434	%	≤ 0.40	≤ 0.40	
Residual indentation / <i>Resteindruck</i> / Poinçonnement statique rémanent / <i>Indrukbelasting</i> / Punzonamiento / <i>Punçoamento</i> / Impronta	EN 433	mm	≈ 0.02	≤ 0.10	
Castor chair test / <i>Stuhlrollenbeanspruchung</i> / Essai de la chaise à roulettes / <i>Rolweerstand bureaustoelen</i> / Determinación del efecto de una silla con ruedas / <i>Resistência a cadeiras de rodas</i> / Resistenza al passaggio di sedie con rotelle (Type W / Typ W)	EN 425	-	OK	OK	
Thermal conductivity / <i>Wärmeleitfähigkeit</i> / Conductivité thermique / <i>Thermische weerstand</i> / Resistencia térmica / <i>Resistência térmica</i> / Resistenza termica	EN 12 524	W/(m.K)	0.25	0.25	
Colour fastness / <i>Lichtechtheit</i> / Solidité lumière / <i>Lichtechtheid</i> / Resistencia a la luz / <i>Estabilidade das cores</i> / Solidità alla luce	EN 20 105 B02	degree	≥ 6	≥ 6	
Surface treatment / <i>Oberflächenvergütung</i> / Traitement de surface / <i>Oppervlaktebehandeling</i> / Tratamiento de superficie / <i>Tratamento de superficie</i> / Trattamento di superficie	-	-	Evercare™	-	
Chemical product resistance / <i>Verhalten gegenüber Chemikalien</i> / Résistance aux produits chimiques / <i>Chemische bestendigheid</i> / Resistencia a los productos químicos / <i>Resistência aos produtos químicos</i> / Resistenza ai prodotti chimici	EN 423	class	Good	Good	
Anti-bacterial activity [E. coli - S. aureus - MRSA] **	ISO 22196	-	> 99 % inhibits growth	-	
ENVIRONMENT / INDOOR AIR QUALITY					
TVOC after 28 days / <i>TVOC (28 Tage)</i> / TVOC (28 jours) / <i>TVOC (28 dagen)</i> / TVOC (28 dias) / <i>TVOC (28 dias)</i> / TVOC (28 giorni)	ISO 16000-6	µg/m³	< 10	< 10	
Certification	-	-	Floorscore™	Floorscore™	
CE marking / <i>CE Kennzeichnung</i> / Marquage CE / <i>EG-conformiteitsmerk</i> / Marca de conformidad CE / <i>Marca de conformidade CE</i> / Marcatura CE di conformità					
	EN 14041	-			
		-			


\*Products available in tiles for a minimum quantity order of 500 sqm - \*\* The implementation of an effective cleaning method is the best defence against infection

INSTALLATION

Laying is the responsibility of the installer. Installation should be made in accordance with installation guidelines supplied and regularly updated by Gerflor's Technical Department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using Gerflor matching weld rod.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and damp mopping using a neutral cleaner, or auto scrubber machine with an appropriate pad.

 Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

Further installation and maintenance instructions are available from Gerflor.



Committed to sustainable development

Gerflor

Don't forget our complementary ranges!

