


MIPOLAM AMBIANCE ULTRA

gerflor.com

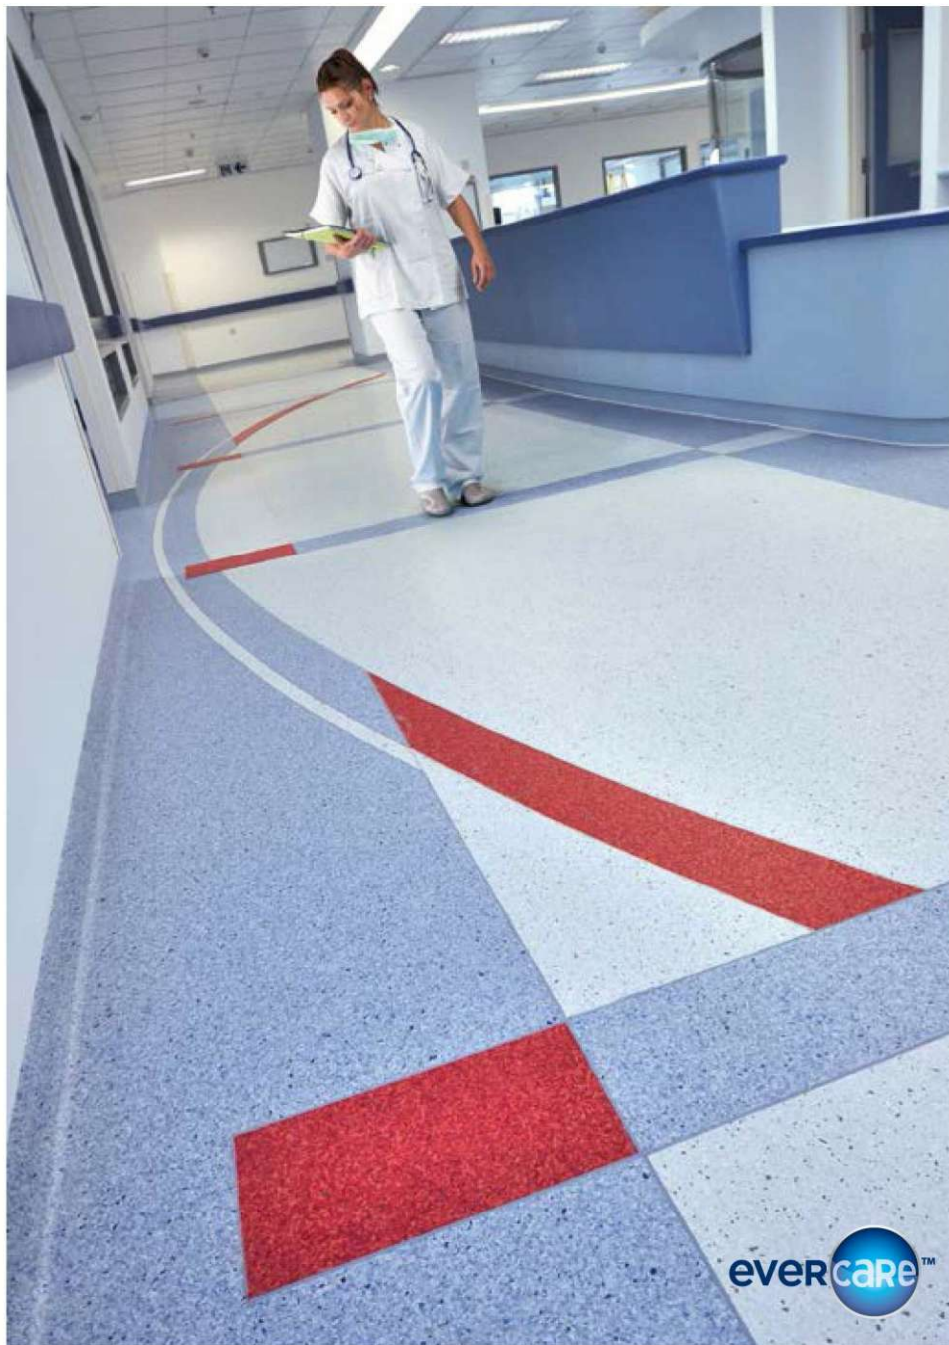


evercare™

Gerflor®
theflooringgroup

EXCLUSIVE SURFACE TREATMENT FOR ENHANCED PERFORMANCE IN **HEALTHCARE**

STAIN BARRIER

Unrivalled level
of stain and chemical
resistance

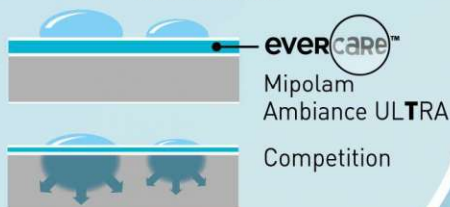

100% HYGIENIC
No contamination
& bacteria development



HIGH PERFORMANCE
floorcovering for heavy
traffic areas




T group

evercare™

PATENTED TECHNOLOGY
BY GERFLOR

NO WAX FOR LIFE

Easy to maintain with minimal
environmental impact

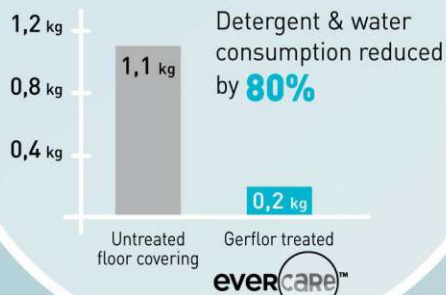
















TVOC
< **10**
 $\mu\text{g}/\text{m}^3$
after 28 days

**HIGHEST
INDOOR AIR QUALITY**

STAIN BARRIER

Results after cleaning with a neutral detergent


	MIPOLAM AMBIANCE ULTRA	COMPETITION A	COMPETITION B
IODINE			
BLACK SHOE POLISH			
CARBON POWDER			
SCUFFING			
BLACK MARKER			

SCRATCH RESISTANCE

Results after scratching with sand paper (200)

	MIPOLAM AMBIANCE ULTRA	COMPETITION A	COMPETITION B
SCRATCHING WITH SAND PAPER			

MIPOLAM FLOOR & WALL SYSTEM: 100% **HYGIENIC** SOLUTION

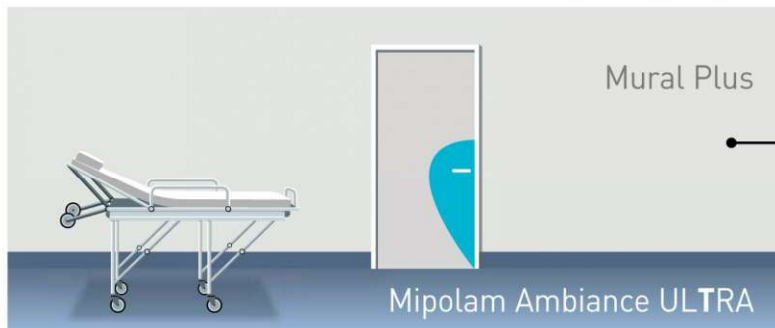

Mural Plus
acts as a buffer
against damages
(beds, trolleys...)

100% WATERTIGHTNESS

- ▶ **NO CONTAMINATION** areas between floor and wall covering
- ▶ **NO BACTERIA** development

100% HYGIENIC

- ▶ Wallcovering offering **PERFECT CLEANING CHARACTERISTICS** (PUR): humidity resistant and ease of maintenance
- ▶ **NO BACTERIA DEVELOPMENT** with an adapted cleaning method (cleanrooms, operating theatres...)

DIMINISHING PROFIL


COVE FORMER

100% DURABLE FLOORING

- ▶ Adapted to **INTENSE TRAFFIC**
- ▶ Staining resistance to healthcare products (Eosine, Iodine) with Evercare™ treatment

100% CLEAN

- ▶ Open angles for **PERFECT CLEANING** (mechanical and manual)
- ▶ The cove former avoids any damage in angles where soiling could accumulate

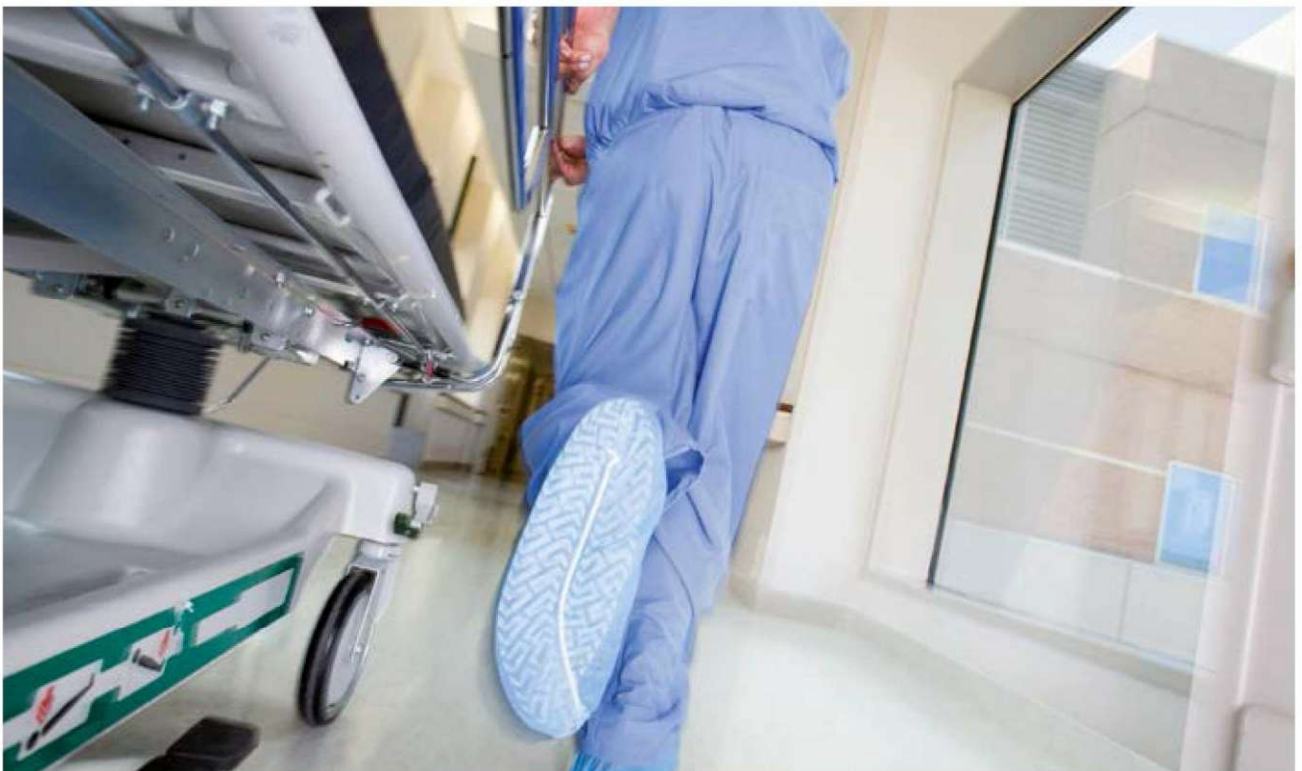

MIPOLAM AMBIANCE ULTRA



2075 Lavander



2070 Ink blue



2063 Emerald



2069 Sky



2066 Forest



2065 Bamboo



2081 Cobalt



2068 Sea blue



2076 Storm



2067 Pool



2082 Ocean



2064 Hunting


MURAL PLUS



3005



3006

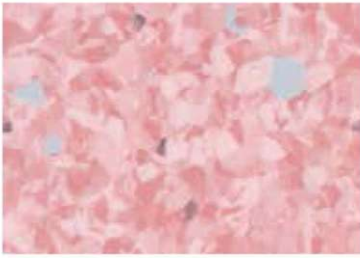

2083 Candy



2073 Vanilla



2079 Capuccino



2078 Corn



2071 Imperial red



2072 Terracotta



2074 Pumkin



2080 Espresso



3008



3010

MIPOLAM AMBIANCE ULTRA



2053 Mouse



2055 Opale



2058 Fog



2052 Ash



2054 Cloud



2050 Midnight



2056 Deer



2051 Charcoal

MURAL PLUS



3011



2084 Cream



2077 Latte



2061 Sand




2062 Beach



2059 Camel



2060 Sahara

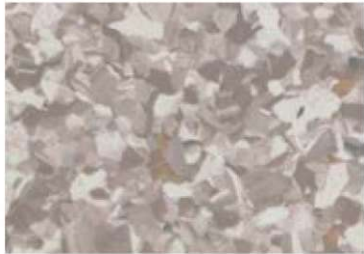

2057 Coffee



3009



3004



3001

MIPOLAM AMBIANCE ULTRA

gerflor.com

MIPOLAM AMBIANCE ULTRA is an homogeneous flooring with high PVC content pressed in 2m sheets, with a thickness of 2mm and a weight of $\leq 2750\text{g}$. It offers a non-directional design, colour dyed as a raw mixture to ensure even colours throughout the thickness and a matt finish.

MIPOLAM AMBIANCE ULTRA is recommended for private and administrative buildings and thanks to its great flexibility it simplifies the installation of bend-up skirting, as well as angles and hot welding procedures.

MIPOLAM AMBIANCE ULTRA is treated with Evercare™ or the latest improvements in polyurethane surface treatment obtained by UV laser cross-linking. Evercare™ avoids staining of chemical products used in healthcare like betadine, eosin or anti-bacterial hand gel and increases the durability of the flooring.

This treatment has excellent maintenance characteristics; it requires no wax for life!

MIPOLAM AMBIANCE ULTRA is composed of a minimum of 25% recycled content 100% controlled and is REACH compliant.

MIPOLAM AMBIANCE ULTRA is anti-static ($<2\text{kV}$), fungistatic, bacteriostatic and resistant to the main chemical products used in healthcare.

MIPOLAM AMBIANCE ULTRA is non-reactive to residual indentation with a value $\leq 0,03\text{ mm}$ [EN 433].

MIPOLAM AMBIANCE ULTRA complies with EN 649 [34-43] offering a group **T** wear rating suitable for very heavy duty traffic areas and Bfl-s1 fire resistance.



MIPOLAM AMBIANCE ULTRA emission rate of volatile organic compounds is $<10\text{ }\mu\text{g}/\text{m}^3$ (TVOC after 28 days ISO 16000-6).

MIPOLAM AMBIANCE ULTRA is available in 35 fashionable and relaxing colours.

MURAL PLUS is a homogeneous flexible vinyl sheet. It is designed to be a permanent wall covering.

Full resistant to impact, it acts as a buffer against damage from beds, trolleys and indoor motorized vehicles and other transportation systems.

MURAL PLUS is fully impact resistant and is therefore ideal for use as a cladding in large public buildings such as hospitals care institutions dental and veterinary surgeries, clean rooms, stores and supermarkets, warehouse and storage areas. It is 100 % recyclable.

PRODUCT TYPE	MIPOLAM AMBIANCE ULTRA		MURAL PLUS	
	Floorcovering		Wallcovering	
Total thickness	EN 428	mm	2.00	1.00
	ASTM F386-02	inch	0,08	0.04
Weight	EN 430	g/sq.m	2750	1750
		lbs/sq.ft	0.56	0.36
Width/length of sheet	EN 426	cm/lm	200 / 20	200 / 30
	-	feet - inch	6'6" / 66"	6'6" / 99"
Coverage / roll	-	m ²	40	60
	-	sq.feet	430,56	645,84
CLASSIFICATION				
Norm/product specification	-	-	EN 649	EN 15 102
	ASTM F1913-04	-	compliant	-
European classification	EN 685	class	34 - 43	-
Fire rating	EN 13 501-1	class	Bfl-s1	Cs3-d0
	ASTM E648-08	class	Class 1	-
	CAN/ULC 102.2	class	Tested in accordance	-
Static electrical propensity	EN 1815	kV	< 2	< 2
PERFORMANCE				
Wear resistance	EN 660.2	mm ³	< 2.0	-
Wear group	EN 649 - EN 651	-	T	-
Type binder content	ISO 10581	type	I	-
Dimensional stability	EN 434	%	≤ 0.40	-
Residual indentation (requirement)	EN 433	mm	≈ 0.03	-
Castor chair test (type W)	EN 425	-	OK	-
Thermal conductivity	EN 12 524	W/(m.K)	0.25	-
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	Evercare™	PUR
Chemical products resistance ⁽¹⁾	EN 423	-	Excellent	Good
ENVIRONMENT / INDOOR AIR QUALITY				
TVOC after 28 days	ISO 16000-6	$\mu\text{g}/\text{m}^3$	< 10	-
Certification	-	-	Floorscore™	-
CE marking				
CE	EN 14041	-		-
		-		-

⁽¹⁾ Regarding the resistance to chemicals, please download the corresponding leaflet from our website.



Committed to sustainable development

Gerflor
theflooringgroup